
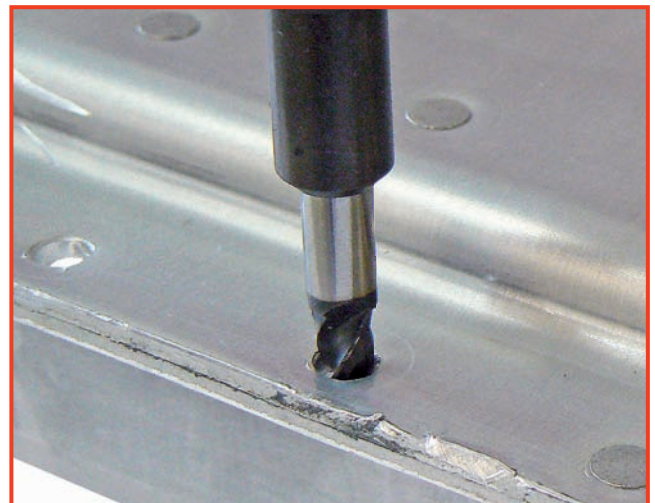
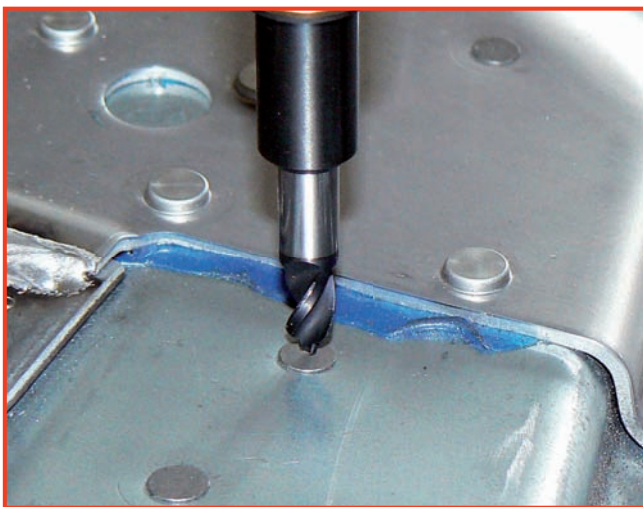


## W+S Drill Bit NK-2F

Center drill to separate rivet connections

- ✓ Steel - steel
- ✓ BTR-USIBOR/THLE/BORON/HLE
- ✓ Steel - aluminium
- ✓ Aluminium-steel

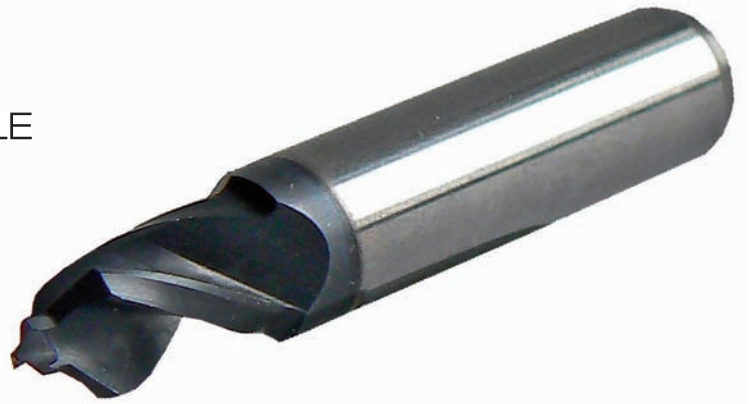

1. **Boring** the rivet to separate the connections and at the same time
2. **Pre-drilling** for the new replacement rivet

Absolute precise guidance and drilling  
 - **without** center punching!

Tech. Data: Dimentions: Ø 6,7 x 44 mm

recom. speed: ≤ 2.000rpm. Art.-No. 627001

**W+S Hotline Tel. +49 7464 9898 0 Fax +49 7464 9898 289**

### Accessories

Cutting oil BTR-Fluid  
 Art.-No. 628000



Drill Bit Extension VD 305  
 Art.-No. 628012

